



Exterior



Washability

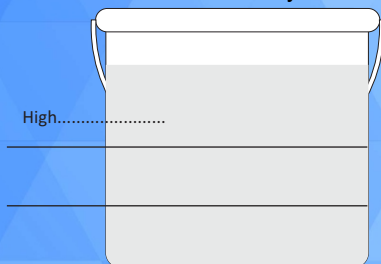

Shelf life: 3 years from the date of manufacture in original tightly closed containers away from direct sunlight and excessive heat

On normal masonry surface by brushing



**Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity



ISO: 9001:2015 (QMS)

Aqua Paints Allguard Weatherproof Emulsion is a smooth water-based, modified acrylic, exterior wall finish with silicon additives. Allguard is specially formulated to withstand extreme tropical conditions of high rainfall, humidity and heat

Excellent Protection against UV Attack

Allguard provides extremely good protection against alkali and UV degradation thus ensuring that the shade doesn't fade for a long time and the paint lasts longer.

Excellent Anti Fungal Performance

Allguard provides excellent resistance to growth of algal and fungal on the walls. This prevents appearance of black spots on walls due to algal growth.

Fantastic Shade Range

Allguard comes in attractive shades that include dark shades that provide excellent hiding.

For the best performance of the paint, ensure proper washing and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

- Drying time: Surface dry time 30 min
- Sheen levels: 5-7 at 60 deg GH
- Flash point IS101/1987 Part 1, Sec 6: NA
- Stability of thinned paint: To be used within 24 hours

- ◆ Do not apply when ambient temperature is less than 10°C or if the temperature might drop is this level within 4 hrs of applications
- ◆ Do not over-thin or over-extend the brush
- ◆ Stir well and strain before use
- ◆ Tinted paints need thorough shaking immediately after stainer addition as well as before use
- ◆ Store the container with the lid tightly closed in an upright position in a cool dry place
- ◆ Keep out of reach of children and away from eatables
- ◆ May be harmful if swallowed. In case of ingestion seek immediate medical attention
- ◆ Wear eye protection during application in case of contact with eyes, rinse immediately with plenty of water and seek medical advice
- ◆ In case of skin contact immediately wash skin with soap and plenty of water Get medical attention if irritation develops or persists.
- ◆ Do not breathe vapor or spray It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation
- ◆ Do not pour leftover paint down the drain or in water courses.
- ◆ In the event of spills, contain spillage using sand or earth
- ◆ No added Lead. Mercury or Chromium compounds.

AQUA PAINTS & CHEMICALS

214 & 215, JCK Industrial Park, Belagola Industrial Area
KRS Cross Road, Metagalli, Mysuru-570016



www.aquapaintsindia.com



aquapaintsindia@gmail.com



+91-821-4850856