



Aqua Primoseal is a high opacity primer for wall and roof coatings which provides excellent efflorescence resistance due to its chemical inertness. Used as a primer on internal/External surface like walls, terrace and roofs. Aqua Primoseal is water based primer composed of acrylic emulsion polymer properly selected fine fillers and additives in water as a medium. It is used as a primer over exterior and roof coating top coat like Damplock.

Features & Benefits :


Bonding - Good binding of chalky or porous substrates and over coating

Suitability - Used as a prior on internal and external surfaces

Alkali resistant - Based on chemically inert polymers hence suitable for high alkali substrates


Penetration - Provides deep penetration thus imparts excellent substrate adhesion

Efflorescence - Provides excellent efflorescence resistance due to its chemical inertness

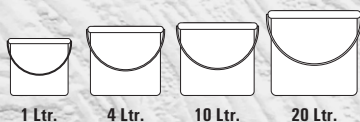

Shelf life: 3 years from the date of manufacture is original tightly closed containers away from direct sunlight and excessive heat

On smooth primed masonry surface



80-100
Sq.ft/ltp**



Drying Time
30 min

60-80
Sq.ft/ltp**

**Actual coverage may vary from the quoted coverage due to factors such as method and condition or application and surface roughness and porosity

Apply an emulsion coat over Exterior Wall Primer.

a. Drying time: Surface dry time 30 min

b. Sheen levels: 15-35 at 35 deg GH

c. Flash point IS101/1987 Part 1. Sec 6: NA

d. Stability of thinned paint: To be used within 24 hours



Can be used for priming plastered walls, asbestos, brick work, concrete etc.,

- ◆ Do not apply when ambient temperature is less than 10°C or if the temperature might drop is this level within 4 hrs of applications
- ◆ Do not over-thin or over-extend the brush
- ◆ Stir well and strain before use
- ◆ Tinted paints need thorough shaking immediately after stainer addition as well as before use
- ◆ Store the container with the lid tightly closed in an upright position in a cool dry place
- ◆ Keep out of reach of children and away from eatables
- ◆ May be harmful if swallowed. In case of ingestion seek immediate medical attention
- ◆ Wear eye protection during application in case of contact with eyes, rinse immediately with plenty of water and seek medical advice
- ◆ In case of skin contact immediately wash skin with soap and plenty of water Get medical attention if irritation develops or persists.
- ◆ Do not breathe vapor or spray It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation
- ◆ Do not pour leftover paint down the drain or in water courses.
- ◆ In the event of spills, contain spillage using sand or earth
- ◆ No added Lead, Mercury or Chromium compounds.



ISO: 9001:2015 (QMS)

AQUA PAINTS & CHEMICALS

214 & 215, JCK Industrial Park, Belagola Industrial Area
KRS Cross Road, Metagalli, Mysuru-570016

