



Aqua Paints Blossom Gloss Enamel imparts a shiny new look to surfaces painted with this finish. It forms a tough film that is highly resistant to household stains. It thereby serves as protective armour around the painted surface

High Gloss Finish

Aqua Blossom Enamel gives a mirror like gloss for your doors, windows, grills & gates


Tough and Durable

The oil based film of Aqua Blossom Enamel makes it one of the toughest & most durable paints which forms a protective armour around surfaces

Stain Gaurd

Aqua Blossom Enamel is a highly washable paint, thus you can wipe off most common household stains easily

Washability

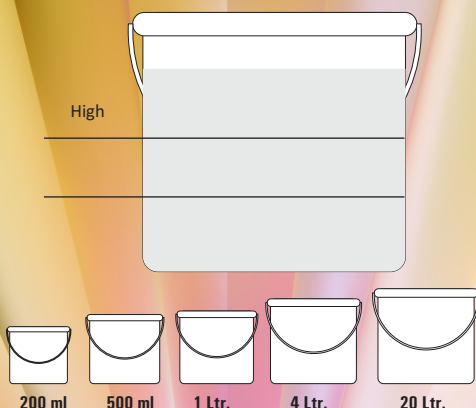

Shelf life: 3 years from the date of manufacture in original tightly closed containers away from direct sunlight and excessive heat

On smooth primed masonry surface by brushing



Drying Time
5 hrs

**Actual coverage may vary from the quoted coverage due to factors such as method and condition or application and surface roughness and porosity

- Drying time: Surface dry time 5 hrs
- Gloss levels: 75-85 on tin plate at 20 Deg Gloss Head
- 1s101/1987 Part 1 Sec 6 35 Deg C (95 Deg F)
- Stability of thinned paint: To be used within 24 hours

- ◆ Do not apply when ambient temperature is less than 10°C or if the temperature might drop is this level within 4 hrs of applications
- ◆ Do not over-thin or over-extend the brush
- ◆ Stir well and strain before use
- ◆ Tinted paints need thorough shaking immediately after stainer addition as well as before use
- ◆ Store the container with the lid tightly closed in an upright position in a cool dry place
- ◆ Keep out of reach of children and away from eatables
- ◆ May be harmful if swallowed. In case of ingestion seek immediate medical attention
- ◆ Wear eye protection during application in case of contact with eyes, rinse immediately with plenty of water and seek medical advice
- ◆ In case of skin contact immediately wash skin with soap and plenty of water Get medical attention if irritation develops or persists.
- ◆ Do not breathe vapor or spray It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation
- ◆ Do not pour leftover paint down the drain or in water courses.
- ◆ In the event of spills, contain spillage using sand or earth
- ◆ No added Lead, Mercury or Chromium compounds.



ISO: 9001:2015 (QMS)

AQUA PAINTS & CHEMICALS

214 & 215, JCK Industrial Park, Belagola Industrial Area
KRS Cross Road, Metagalli, Mysuru-570016

