

Exterior



Aqua Paints Pace Exterior Emulsion is a water based exterior wall finish with silicon additives suitable for dry to moderately humid climate conditions

Better Performance:

Pace offers excellent resistance to chalking, cracking and weathering in comparison to cement paint. Its modified acrylic binder ensures that paint stays on your wall longer than cement paint

Save money in the long run:

PACE lasts longer than cement paint and hence proves more economical in the long run. It also does not require curing and therefore saves time, effort and money during application


Clean Shades:

PACE gives neat and clean shades that do not fade and last longer than cement paint shades. It is available in strong dark shades that provide excellent hiding. It is available in over 1500 attractive shades

Better Anti-algal Performance:


PACE provides better anti-algal protection than cement paint especially in dry to moderately humid climate conditions

Washability

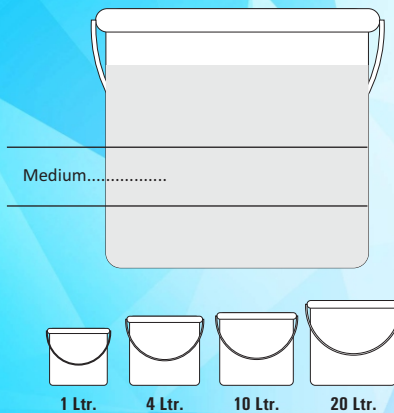

Shelf life: 3 years from the date of manufacture in original tightly closed containers away from direct sunlight and excessive heat

On normal masonry surface by brushing

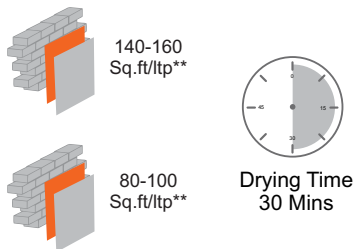

**Actual coverage may vary from the quoted coverage due to factors such as method and condition or application and surface roughness and porosity

- a) Drying time: Surface dry time 30 min
- b) Sheen levels: 3-12 at 60 deg GH
- c) Flash point IS101/1987 Part 1, Sec 6: NA
- d) Stability of thinned paint: To be used within 24 hours

- ◆ Do not apply when ambient temperature is less than 10°C or if the temperature might drop is this level within 4 hrs of applications
- ◆ Do not over-thin or over-extend the brush
- ◆ Stir well and strain before use
- ◆ Tinted paints need thorough shaking immediately after stainer addition as well as before use
- ◆ Store the container with the lid tightly closed in an upright position in a cool dry place
- ◆ Keep out of reach of children and away from eatables
- ◆ May be harmful if swallowed. In case of ingestion seek immediate medical attention
- ◆ Wear eye protection during application in case of contact with eyes, rinse immediately with plenty of water and seek medical advice
- ◆ In case of skin contact immediately wash skin with soap and plenty of water Get medical attention if irritation develops or persists.
- ◆ Do not breathe vapor or spray It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation
- ◆ Do not pour leftover paint down the drain or in water courses.
- ◆ In the event of spills, contain spillage using sand or earth
- ◆ No added Lead. Mercury or Chromium compounds.



ISO: 9001:2015 (QMS)

AQUA PAINTS & CHEMICALS

214 & 215, JCK Industrial Park, Belagola Industrial Area
KRS Cross Road, Metagalli, Mysuru-570016

